

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 574 164 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
30.07.1997 Bulletin 1997/31

(51) Int. Cl.⁶: **A47B 88/10**

(21) Application number: **93304117.0**

(22) Date of filing: **27.05.1993**

(54) **Thin offset drawer slide with progression roller**

Dünne Ausziehführungsgarnitur mit Seitenversatz und Begleitrolle

Glissière de tiroir mince, à déport latéral et rouleau de progression

(84) Designated Contracting States:
AT DE ES FR GB IT

(30) Priority: **08.06.1992 US 895264**

(43) Date of publication of application:
15.12.1993 Bulletin 1993/50

(73) Proprietor: **ACCURIDE INTERNATIONAL, Inc.**
Santa Fe Springs, California 90670-4721 (US)

(72) Inventors:

- Kovarik, Franz
D-65549 Limburg (DE)
- Ongley, James
Glendale, California 91207 (US)

(74) Representative: **Enskat, Michael Antony Frank**
Saunders & Dolleymore,
9, Rickmansworth Road
Watford, Hertfordshire WD1 7HE (GB)

(56) References cited:

GB-A- 783 826 **US-A- 3 912 341**

EP 0 574 164 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

The present invention generally relates to slide mechanisms for drawers slidable in articles of furniture. The invention specifically relates to a three-part heavy-duty miniature ball bearing drawer slide mechanism with offset outer channel members and a progression roller which assists closure and detent of the slide.

To reduce friction and enable a drawer to withstand a heavy load, drawer slides for furniture in file cabinets and other furniture employ bearings to reduce wear. Professional furniture for medical, industrial, and engineering applications often requires thin drawers and thin drawer slides. Such applications also require a heavy-duty slide. Four sets of ball bearings are usually required to bear a typical load when full extension is required. However, the use of four separate sets of ball bearings poses obstacles to miniaturization of the slide. Furniture designers desire the cross-section profile of the slide to be thin in the horizontal direction, thereby enabling a drawer to be as wide as possible compared to the opening in which it slides. Moreover, designers want slides which are shallow in the vertical direction to keep the slide unobtrusive, and enable use with short drawers.

In most drawer slides of the prior art, the four separate ball bearing assemblies are aligned in pairs on two spaced-apart vertical axes. To make a drawer slide thin in the horizontal direction, designers have focused on making the relative vertical separation of one pair of bearings narrower than the other. This enables the vertical axes of the bearing pairs to become nearly collinear, resulting in a thin slide.

For example, U.S. Patent No. 5,022,768 (Baxter) discloses, in FIG. 1, a prior art slide mechanism in which the ball bearing pairs are on nearly collinear vertical axes. FIGS. 3, 4, and 7 of U.S. Patent No. 4,469,384 (Fler et al.) discloses a similar collinear axis slide. However, the cross-section profile of the resulting slide is not symmetrical, requiring the separate fabrication of a fixed cabinet member and a moving drawer member, each having a different cross-section. This increases manufacturing costs and increases the height profile of the slide.

Thus, designers of drawer slides desire to provide a slide which is horizontally thin and vertically short to enable unobtrusive installation in a variety of furniture mounting arrangements. Designers of drawer slides also desire to provide a slide in which the central slide member is structurally stable.

Another goal of slide design is smooth control of extension of the slide. U.S. Patent No. 4,662,761 discloses a multi-part slide with a roller. This slide requires four outside channel members and separate plates to join the channels together. The bearings are arranged on a vertical collinear axis. The roller 18 has a horizontal axis of rotation and provides sequential motion rather than smooth progressive movement.

U.S. Patent No. 3,966,273 shows a slide with pro-

gressive movement control of a ball retainer using bands of material which impose friction. U.S. Patent No. 3,901,564 shows a slide with a progression roller having a horizontal axis of rotation. The roller imposes friction on the outer channel members of the slide.

US Patent No 3,857,618 shows control of a ball retainer using a rack and pinion arrangement best seen in FIG. 11. The pinion gear has a horizontal axis of rotation but requires clearance space at the bottom of the slide channel members, thereby increasing the overall height of the slide. Punched holes are required in the slide.

US Patent No 3,679,275 shows a drawer slide with four outer channel members and a roller mounted on a vertical shaft. The roller has a knurled outer surface which imposes friction on the inside faces of outer plates which hold the four channel members together. This requires special preparation of the slide member surfaces, which leads to higher manufacturing costs and greater complexity of design. Also, US-A-3,679,275 requires two separate sets of sliding components.

US Patent No 3,912,341 discloses a slide apparatus having two channels members, bearing retainers and an intermediate slide member having a central wall. The wall has a window for a roller rotating about a vertical axis. No detent mechanism for the slide apparatus is provided. The roller remains under compression at all time. In due course, deformation of the roller could become permanent.

Thus, the prior art fails to provide a drawer slide which is horizontally thin and vertically shallow or short, and also incorporates a progression roller system. GB-A-783 826 discloses a double extension slide having a pair of channel members separated by an intermediate slide member and running on four sets of bearings. The intermediate member is a unitary combination of a central wall carrying two pairs of bearing raceways. Rollers are mounted between the channel members to stabilise relative motion. This prior art fails to provide a slide with having progression roller which can facilitate closure of the slide, act as a detent, and also release pressure on the roller when the slide is closed. A particular disadvantage of prior art slides with progression rollers is that when closed, the roller is in constant compression within the slide. This results in permanent flattening or deformation of the roller over time. This causes undesirable bumpy movement of the slide.

It is an object of the invention to provide an improved slide apparatus.

According to the present invention there is provided a slide apparatus comprising a pair of facing channel members, an intermediate slide member located between the channel members, a plurality of bearings with bearing retainers between each channel member and the intermediate slide member maintaining a predetermined separation between the two channel members, and a deformable progression roller mounted for rotation about a vertical axis in a roller clearance window in the intermediate slide member, the progression

roller when deformed making frictional contact with both channel members characterised in that the channel members have at least one roller clearance window into which the progression roller expands when the apparatus is in a fully closed position.

Various modifications of the slide apparatus defined in independent claim 1 are defined in the dependent claims 2 to 6.

Slide apparatus embodying the present invention, will now be described, by way of example, with reference to the accompanying diagrammatic drawings, in which:

FIG. 1 is a cross-section view of a first embodiment of a three-part drawer slide with progression roller according to the invention;

FIG. 2 is a cross-section view of a second embodiment of a drawer slide, with double-thickness intermediate member raceways, having no bearing retainers and showing fasteners for securing the slide;

FIG. 3 is a cross-section view of a third embodiment of a drawer slide having no progression roller;

FIG. 4 is a cross-section view of a fourth embodiment of a drawer slide according to the invention;

FIG. 5 is a partial elevation view of a drawer assembly showing the slide of FIG. 1 secured to a drawer and an article of furniture;

FIG. 6 is an elevation view of the drawer slide of FIG. 1, showing the slide in a fully closed position;

FIG. 7 is a section view of the slide of FIGS. 1 and 6 taken on line 7-7 of FIG. 6;

FIG. 8 is an elevation view of the drawer slide of FIG. 1, showing the slide in an open position;

FIG. 9 is a section view of the slide of FIGS. 1 and 8 taken on line 9-9 of FIG. 8 with an exaggerated representation of a roller;

FIG. 10 is a partial cross-section view of the slide of FIG. 1 in a nearly closed position; and

FIG. 11 is a partial schematic view of the slide of FIG. 10 showing rotational stress on the roller.

In the following detailed description of the preferred embodiments, specific terminology is used for the sake of clarity. However, the invention is not limited to the specific terms selected, but includes all technical equivalents functioning in a substantially similar manner to achieve a substantially similar result.

General construction details of three-part drawer slides are well known in the art. Relevant disclosures, showing typical prior art slides, ball bearing retainers, channel members and stop mechanisms include U.S. Patent Nos. 4,537,450 (Baxter); 4,991,981 (Baxter); and the patent references discussed above in the section entitled "Background of the Invention." The reader is directed to these references for general construction details and configurations of three-part drawer slides.

FIG. 1 shows a cross-section view of a drawer slide 10 according to the invention. FIGS. 6 to 11 show eleva-

tion and plan views of the slide of FIG. 1. The drawer slide comprises an outer slide member or outer channel member 20 which in a first of two alternate orientations is affixed to an interior wall of a stationary article of furniture; an intermediate slide member 30 which is slidable in the outer member 20; and an inner slide or channel member 40 which can be affixed to an outer surface of a side wall of a movable drawer. A second alternate orientation is shown in FIG. 5 and described below. A first set of ball bearings 70 enable outer slide member 20 to telescope in and out of the intermediate slide member 30. Likewise, a second set of ball bearings 72 mounted between intermediate member 30 and outer member 20 enable the intermediate member to slide through the outer member. To be retained in the channel members the bearings are rotatably or rollably mounted in bearing retainers or ball spacers 74. The retainers axially retain the bearings so as to keep each set together, while the channel members and intermediate slide member retain the bearings. A stop (not shown) can be provided to prevent the drawer from being pulled entirely out of the article of furniture.

The channel members 20, 40 preferably are symmetrically identical. The slide is mounted to the drawer and article of furniture via the channel members. The discussion below relates to details of the outer channel member 20 in FIG. 1, but the same parts are provided in symmetrically opposite locations on the inner channel member 40. The inner and outer channel members can be manufactured in identical form and assembled in opposite orientation and are elongated to any desired slide length. The channel members are preferably formed with a vertically elongated "C" shaped cross-section using cold-rolled steel or other suitable material, and comprise a generally vertical or flat outer wall 22, upper and lower inwardly angled walls 26, and arcuate top and bottom walls 28. In this description, "inwardly" means toward a center axis of the intermediate slide member 30. The inner surfaces 29 of top and bottom walls 28 form raceways or trackways for the ball bearings 70, 72.

The intermediate slide member 30 preferably is formed in a single piece of steel or other suitable material. The intermediate member can be roll-formed or solid extruded metal. The unitary construction adds structural stability and reduces manufacturing costs of the entire apparatus. Moreover, the central member is symmetrical and may be inverted or reversed without affecting the operation of the mechanism. For clarity, details of the intermediate member 30 of FIG. 1 are identified by reference numerals on FIG. 3. One of ordinary skill in the art will readily understand that the intermediate members of FIGS. 1 and 3 are identical, except that the intermediate member of FIG. 1 additionally comprises a progression roller as discussed below.

As indicated in FIG. 3, the intermediate slide member 30 comprises a central vertical wall 32 unitarily formed with upper and lower short horizontal walls 34A, 34B. Preferably, the horizontal walls are joined at an

approximately right angle to the central wall. Using a sharp or hair pin bend, the walls 34A, 34B are joined to upper and lower parallel arcuate raceway members 36A, 36B. Preferably, each of the raceway members includes an arcuate raceway surface 38A, 38B. The raceways provide a second trackway or bearing surface for ball bearings 70, 72.

Thus, in operation, when the outer or inner channel members are moved axially in or out, the ball bearings 70, 72 will simultaneously rotate on the trackways formed by the inside face 29 of the outer and inner channel members and on the outward-facing raceways 38A, 38B on the intermediate slide member.

Preferably, a central vertical axis of the central wall 32 forms a center of gravity of the slide, so that a downward-bearing load placed on the top of channel member 20 is directed down into the central wall.

The intermediate member 30 further comprises angled arms 80A, 80B joined at one end to raceway members 36A, 36B. The opposite end of the angled arms 80A, 80B is joined to short vertical walls 82A, 82B. These vertical walls are joined at their upper ends to arcuate upper and lower raceways 84A, 84B. These upper and lower raceways provide a ball bearing trackway or raceway directly opposite raceways 29. This combination of elements provides an intermediate member enabling four sets of ball bearings to be arranged on nearly collinear axes, minimizing the horizontal thickness and the vertical height of the slide.

The structure of the intermediate member also enables greater "wrap" around the ball bearings 70, 72. As is known in the art, "wrap" refers to the amount of perimeter surface of the bearing which is covered or guided by a raceway. A large amount of wrap is desirable to prevent lateral disengagement (pulling apart) of the slide. As shown in FIGS. 1 and 3, the ball bearings 70, 72 are nearly encircled completely by raceways 29, 84A and arcuate member 28 and raceway 38A, 38B.

The slide of FIG. 1 also comprises a progression roller 80 which can rotate on a vertical axis on axles 82, 84. Preferably the roller comprises a resilient material such as soft rubber with a steel core. The axles are formed in a window or cutout 86 of central wall 32 of intermediate member 30 leaving small clearance 88. When the slide is opened or closed, as discussed below, the perimeter surface 89 of the roller rolls against the interior faces 24, 44 of the channel members 20, 40. Friction caused by contact of the rubber roller with the metal channel members enables smooth, controlled, progressive opening and closing of the slide. Unlike the prior art, the central mounting location of the roller enables use of a progression roller in a horizontally thin and vertically short slide.

Unlike two-part drawer slides, three-part drawer slides permit full outward extension of a drawer from a cabinet. The progression roller enables smooth and controlled extension of the slide without hitting noise. Three-part slides without progression rollers produce several "clicks" caused by the drawer slide members hit-

ting together as the slide extends. Typically, when a drawer with a prior art slide is pulled out, the movable inner member first extends to its entire length. Inwardly protruding end tabs on the inner member strike the end of the intermediate member, causing "pick up noise" (a "click") and pulling the intermediate member out. When the slide reaches full extension there is another "click" as end tabs on the intermediate member strike stop tabs on the stationary outer member. This phenomenon is well known in the art. It is also possible for the intermediate member to extend first, followed by the movable inner member, but the double click effect is the same.

In contrast, in a slide of the present invention, when a drawer is pulled out of an article of furniture, the inner member extends and the intermediate slide member is also carried forward by the progression roller. As a result, both the movable inner member and the intermediate member extend from the stationary outer member at the same rate, preventing hitting noise or "clicks."

Operation of the progression roller in the slide of FIG. 1 is shown in FIGS. 6 to 11. FIGS. 6 and 7 show elevation and section views, respectively, of the slide of FIG. 1 in the closed position. At least one clearance window 120 is provided in the outer channel member 20. The window 120 preferably comprises a generally rectangular cutout in the outer channel member. The window has a leading edge 122 and a trailing edge 124. When the slide is closed, the roller 80 protrudes through the window, as shown in FIG. 7, and the perimeter surface of the roller rests against the leading and trailing edges 122, 124, 142, 144. Inner channel member 40 has a corresponding window or cutout 140 with a leading edge 142 and a trailing edge 144. When the slide is closed, the windows 120, 140 are opposite one another. In this closed position, the edges of the window act as a detent on the roller. Slight side-to-side pressure on the slide will not cause the slide to move since the protruding roller is abutted against edges 122, 124, 142, 144.

However, firm pressure on the slidable members of the slide will cause the roller to compress inside the slide, moving under edges 124, 142 and assuming the deformed shape shown in exaggerated form in FIGS. 8 and 9. As shown in FIG. 8, when the slide is opened, the roller moves past the window 120 and is compressed between the interior surfaces 24, 44 of outer member 20 and inner member 40. The compression of the roller 80 exerts friction on the channel members, insuring that the slide parts extend smoothly and at a proportional rate. This eliminates the hitting phenomenon found in prior art slides. The progression roller feature also balances the load on the slide, thereby increasing life of the slide.

The window 120 also acts as a decompression mechanism for the roller. In prior art slides with a roller located between outer and inner channel members of a slide, the roller is compressed even when the slide is completely closed. As a result, over time, constant compression of the roller can cause the roller to assume a

distorted shape, or lose its compressive tension entirely. This is known in the art as "taking a set" and results in a malfunction of the roller. In the present invention, the windows 120, 140 enable the roller to release compressive tension when the slide and drawer are completely closed. The window prevents flat spots from forming on the roller when it is in continuous compression. This extends the life of the roller and improves its performance.

The roller also provides a self-closing effect, as illustrated in FIGS. 10 and 11. FIG. 10 provides a section view of the slide of FIGS. 7 and 9, in which the slide channel members are almost closed. In this position, the windows 120, 140 are slightly offset, and the roller assumes an oval shape. Part of the perimeter surface of the roller extends into the windows 120, 140, and a portion of the roller remains compressed in the slide. In this position, rotational tension develops in the roller as indicated by arrows 200, 210 in FIG. 11. This tension urges the roller to rotate, thereby causing the slide to close completely. Thus, if the slide is closed part way, such as by a user pushing a drawer with insufficient pressure to close the drawer completely, the roller will tend to urge the slide (and the drawer) closed. This prevents slides and drawers from stopping in a slightly open position.

In an alternative embodiment, the leading and trailing edges of the windows can be formed at an angle, or can be beveled, so as to enhance or retard detent action of the window.

The roller additionally prevents "creep" of the slide. The friction exerted on the outer and inner channel members by the roller under compression increases the force required to move the slide. This causes the slide to remain in a desired position until sufficient force is exerted on the slide to overcome the friction exerted by the roller.

In an alternate contemplated embodiment, the outer and inner channel members can be provided with multiple windows, thereby enabling use of the windows as detents or multiple stop positions for the slide. The roller can comprise any resilient material and can be synthetic.

Referring to FIG. 2, an alternate embodiment slide is shown. Symmetrically identical left and right (outer and inner) channel members or channel means 20, 40 are provided for slidably attaching the slide to an article of furniture and a drawer. One or more holes 48 can be provided in the vertical wall to enable securement of the slide apparatus to a drawer or an article of furniture using a threaded fastener 50. Preferably, a #6 pan head screw is used for fastening the slide to furniture. Of course, any suitable type of fastener can be used. The fasteners must be flush with the channel or member surface so as to ensure that the roller does not roll over or against the heads of the fasteners. The fasteners could comprise flat head counter sunk threaded screws or bayonets.

Also, in the embodiment of FIG. 2, the raceway members 84A, 84B are joined by an additional hairpin

bend to secondary raceway members 86A, 86B. These members provide double-thickness raceways for the intermediate member, thereby increasing the load which the slide can carry.

In the embodiment of FIG. 3, the ball bearings 70 are retained in left and right bridge-type bearing retainers 60L, 60R. The ball bearing retainers are symmetrically identical, thereby reducing manufacturing costs by enabling a single type of retainer to be used on both sides of the apparatus. As is known in the art, each bridge type bearing retainer holds two sets of ball bearings to cause both sets to move synchronously. Both left and right retainers 60L, 60R include corresponding parts in a like arrangement. The left ball bearing retainer 60L includes a central vertical wall 62. The vertical wall 62 is joined using upper and lower angled walls 64A, 64B. Each angled wall has a plurality of spaced-apart holes or pockets (not shown) in which the ball bearings rotate. The general construction of ball bearing retainers is well-known in the art. For example, the ball bearing retainer disclosed in U.S. Patent No. 4,991,981 (Baxter) is suitable for incorporation in the mechanism disclosed herein.

Another alternate embodiment is shown in FIG. 4. In this embodiment, the intermediate member 30 does not comprise a vertical central wall 32. Instead, the intermediate member comprises a generally horizontal central wall 33 joined by a sharp bend to one end of two short vertical walls 35A, 35B. The opposite end of these walls is joined to the raceway members 36A, 36B. Use of a horizontal central wall 33 in place of the vertical central wall 32 enables the embodiment of FIG. 4 to be vertically shorter than the embodiments of FIGS. 1, 2, and 3. Preferably, the overall height of a side of FIG. 4 is approximately 32 millimeters, and its overall width is about 13 millimeters. The embodiment of FIG. 4 provides a high-strength, heavy-duty miniature drawer slide in which four sets of bearings are provided in a vertically and horizontally compact arrangement.

As shown in FIG. 5, the offset positioning of the channel members facilitates attachment of a slide to a drawer and an article of furniture with the slide in the aforementioned second orientation. In the prior art, slide attachment brackets (not shown) are required to enable attachment of a drawer slide in the arrangement of FIG. 5. The offset channel arrangement of the present invention enables the top surface of the movable channel member 20 to act as a load-bearing member for the drawer.

In this arrangement, a "U"-shaped bracket 90 is provided and secured to the channel member 40 using welding or with a suitable fastener, or using bayonets provided on the exterior surface of the channel member 40. The bracket can comprise a generally vertical wall 92, a horizontal bottom wall 94 joined at a right angle to the vertical wall, and an inner vertical wall 96 which can be joined to the slide. Preferably channel member 40 is welded to a face 98 of the vertical wall 96 or secured thereto using a fastener 105. The bracket can be affixed

to an article of furniture using suitable fasteners such as screws 91.

The drawer 100 comprises top and bottom walls 110, 108 which are spaced apart by an inner vertical wall 104. Storage space 106 is provided in the drawer. An inner vertical wall 102 is provided in spaced-apart relation to the vertical wall 104 with an opening 112 therebetween. Preferably channel member or drawer member 20 is fixed to the wall 102 using brackets or other fastening means (not shown).

The drawer also comprises a load-bearing wall 114 which can be mounted directly on the arcuate wall 28 of the slide. This enables the channel member 20 to transfer load from the drawer to the intermediate member, thereby reducing shear load on whatever fastening means is used. A fascia panel 120 can be provided, to prevent the drawer slide from being visible when the drawer is open.

The ball bearings may be constructed of steel, plastic, ceramic, or any suitable material, and the slide members can comprise steel, stainless steel, plastic, aluminum, or any similar suitable material.

As indicated above, the present invention provides a novel and unique apparatus for facilitating support and smooth sliding of drawers in articles of furniture. A unitarily-formed central or intermediate slide member provides a plurality of raceways for four separate sets of ball bearings, with reduced manufacturing costs and simpler construction than the prior art. Drawer slides according to the invention may be used in a variety of nondrawer applications such as extendable writing surfaces of desks and other applications known in the art.

The invention may be practiced in many ways other than as specifically disclosed herein. For example, the drawings are not rendered to scale and the size of the walls can be modified. In one contemplated embodiment, elongated plastic strips are affixed to the interior faces of the channel members, thereby increasing friction exerted by the progression roller. The plastic strip can be smooth or knurled. Positive progression can be provided by forming the strips as a rack and using a pinion gear instead of a smooth roller. Bayonet mounting tabs can be formed in the channel members to facilitate mounting the slide on metal furniture. Bayonets are preferred for the embodiment of FIG. 1 and FIG. 4 since use of fasteners protruding through the channel members is impractical with these embodiments.

Claims

1. A slide apparatus comprising a pair of facing channel members (20, 40), an intermediate slide member (30) located between the channel members (20, 40), a plurality of bearings (70, 72) with bearing retainers (74) between each channel member (20, 40) and the intermediate slide member (30) maintaining a predetermined separation between the two channel members (20, 40), and a deformable progression roller (80) mounted for rotation about a

vertical axis in a roller clearance window in the intermediate slide member (30), the progression roller (80) when deformed making frictional contact with both channel members (20, 40) characterised in that the channel members (20, 40) have at least one roller clearance window (120, 140) into which the progression roller (80) expands when the apparatus is in a fully closed position.

2. Apparatus according to Claim 1, characterised in that each said channel member (20, 40) is generally C-shaped.
3. Apparatus according to Claim 1 or to Claim 2, characterised in that the or each said clearance window (120, 140) of the channel members (20, 40) comprises a generally rectangular cutout.
4. Apparatus according to Claim 1, characterised in that said plurality of bearings comprises four sets of bearings (70, 72) rollable on and retained by the intermediate slide member (30), in that the intermediate slide member (30) comprises a unitarily formed combination of a central wall (32), a first pair of bearing raceways (38A, 38B) joined to ends of the central wall (32), a second pair of raceways (84A, 84B) each joined to a wall extending angularly outwardly from one of the first pair of bearing raceways, the central wall (32) being generally vertical and defining said roller clearance window (86) in which said progression roller (80) is mounted therein for rotation about a generally vertical axis.
5. Apparatus according to Claim 4, characterised in that perimeter surface of the roller (80) which contacts the interior surfaces of the channel members (20, 40) controls motion of the channel members (20, 40) by the friction between the roller (80) and the channel members (20, 40).
6. Apparatus according to any preceding claim, characterised in that each said clearance window (120, 140) comprises leading and trailing edges spaced apart by an overall width less than a diameter of the roller (80), whereby the leading and trailing edges provide detents to restrict motion of the roller (80) when the slide apparatus is in the fully closed position.

Patentansprüche

1. Gleitvorrichtung, enthaltend ein Paar zueinander-
weisender Kanalelemente (20, 40), ein Zwischen-
gleitglied (30), das zwischen den Kanalelementen
(20, 40) angeordnet ist, mehrere Lager (70, 72) mit
Lagerkäfigen (74) zwischen jeweils den Kanalele-
menten (20, 40) und dem Zwischengleitglied (30),
um eine vorbestimmte Trennung zwischen den bei-
den Kanalelementen (20, 40) aufrechtzuerhalten,

- und eine verformbare Vorwärtsbewegungswalze (80), die drehbar an einer Vertikalachse in einem Walzenfreigabefenster in dem Zwischengleitglied (30) angeordnet ist, wobei die Vorwärtsbewegungswalze (80) bei Verformung in Reibkontakt mit beiden Kanalelementen (20, 40) kommt, **dadurch gekennzeichnet**, daß die Kanalelemente (20, 40) zumindest ein Walzenfreigabefenster (120, 140) aufweisen, in das sich die Vorwärtsbewegungswalze (80) erweitert, wenn sich die Vorrichtung in einer vollständig geschlossenen Position befindet.
2. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß jedes Kanalelement (20, 40) im wesentlichen C-förmig ausgebildet ist.
3. Vorrichtung nach Anspruch 1 oder 2, **dadurch gekennzeichnet**, daß ein oder jedes der Freigabefenster (120, 140) der Kanalelemente (20, 40) einen im wesentlichen rechteckförmigen Ausschnitt aufweist.
4. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß die mehreren Lager vier Lagersätze (70, 72) aufweisen, die auf dem Zwischengleitglied (30) abwälzbar sind und durch das Zwischengleitglied (30) gehalten werden, daß das Zwischengleitglied (30) eine in einem Stück ausgebildete Kombination aus einer Mittenwand (32), einem ersten Paar Lagerlaufbahnen (38A, 38B), die mit den Enden der Mittenwand (32) verbunden sind, und einem zweiten Paar Laufbahnen (84A, 84B) enthält, die jeweils mit einer Wand verbunden sind, die sich in einem Winkel nach außen von einer der Lagerlaufbahnen des ersten Paares Lagerlaufbahnen aus erstreckt, wobei die Mittenwand (32) im wesentlichen vertikal ausgebildet ist und das Walzenfreigabefenster (86) definiert, in dem die Vorwärtsbewegungswalze (80) für die Drehung um die im wesentlichen vertikale Achse angeordnet ist.
5. Vorrichtung nach Anspruch 4, **dadurch gekennzeichnet**, daß die Umfangsoberfläche der Walze (80), welche sich in Kontakt mit den Innenoberflächen der Kanalelemente (20, 40) befindet, die Bewegung der Kanalelemente (20, 40) durch die Reibung zwischen der Walze (80) und den Kanalelementen (20, 40) steuert.
6. Vorrichtung nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet**, daß jedes der Freigabefenster (120, 140) eine Vorder- und eine Hinterkante aufweist, die durch eine Gesamtbreite kleiner als der Walzendurchmesser voneinander beabstandet sind, wodurch die Vorder- und die Hinter-

kante eine Arretierung bilden, um die Bewegung der Walze (80) zu beschränken, wenn sich die Gleitvorrichtung in der vollständig geschlossenen Position befindet.

Revendications

- Dispositif de glissière comprenant une paire de profilés en U (20, 40) se faisant face, un élément intermédiaire de glissière (30) disposé entre les profilés en U (20, 40), une pluralité de billes de roulement (70, 72) munies de cages à billes (74) et agencées entre chaque profilé en U (20, 40) et l'élément intermédiaire (30) de glissière, pour maintenir un écartement prédéterminé entre les deux profilés en U (20, 40), et un galet de progression déformable (80) monté pour tourner autour d'un axe vertical dans une fenêtre de dégagement de galet ménagée dans l'élément intermédiaire (30) de glissière, le galet de progression (80) établissant un contact de frottement avec les deux profilés en U (20, 40) lorsqu'il est déformé, caractérisé en ce que les profilés en U (20, 40) présentent au moins une fenêtre de dégagement de galet (120, 140) dans laquelle le galet de progression (80) s'engage en se dilatant lorsque le dispositif est dans une position entièrement fermée.
- Dispositif selon la revendication 1, caractérisé en ce que chacun des profilés en U (20, 40) a la forme générale d'un C.
- Dispositif selon la revendication 1 ou la revendication 2, caractérisé en ce que la ou chaque fenêtre de dégagement (120, 140) des profilés en U (20, 40) présente une découpe sensiblement rectangulaire.
- Dispositif selon la revendication 1, caractérisé en ce que la pluralité de billes de roulement est composée de quatre jeux de billes de roulement (70, 72) qui peuvent rouler sur l'élément intermédiaire (30) de la glissière et sont retenus sur cet élément, en ce que l'élément intermédiaire (30) de glissière comprend une combinaison en une seule pièce d'une paroi centrale (32), d'une première paire de pistes de billes de roulement (38A, 38B) qui font suite aux extrémités de la paroi centrale (32), une deuxième paire de pistes (84A, 84B) dont chacune fait suite à une paroi qui part de l'une des pistes de ladite première paire de pistes de billes dans une direction inclinée vers l'extérieur, ladite paroi centrale (32) étant sensiblement verticale et définissant la fenêtre (86) de dégagement de galet dans laquelle ledit galet de progression (80) est monté pour tourner autour d'un axe sensiblement vertical.
- Dispositif selon la revendication 4, caractérisé en ce que la surface périphérique du galet (80) qui

entre en contact avec les surfaces intérieures des profilés en U (20, 40) contrôle le mouvement des profilés en U (20, 40) au moyen du frottement entre ledit galet (80) et lesdits profilés en U (20, 40).

6. Dispositif selon l'une quelconque des revendications précédentes, caractérisé en ce que chacune des fenêtres de dégagement (120, 140) des profilés en U (20, 40) présente des bords avant et arrière espacés d'une largeur totale qui est inférieure au diamètre du galet (80), de sorte que ces bords avant et arrière forment des encliquetages pour restreindre le mouvement dudit galet (80) lorsque le dispositif de glissière est dans la position entièrement fermée.

5

10

15

20

25

30


35

40

45

50

55

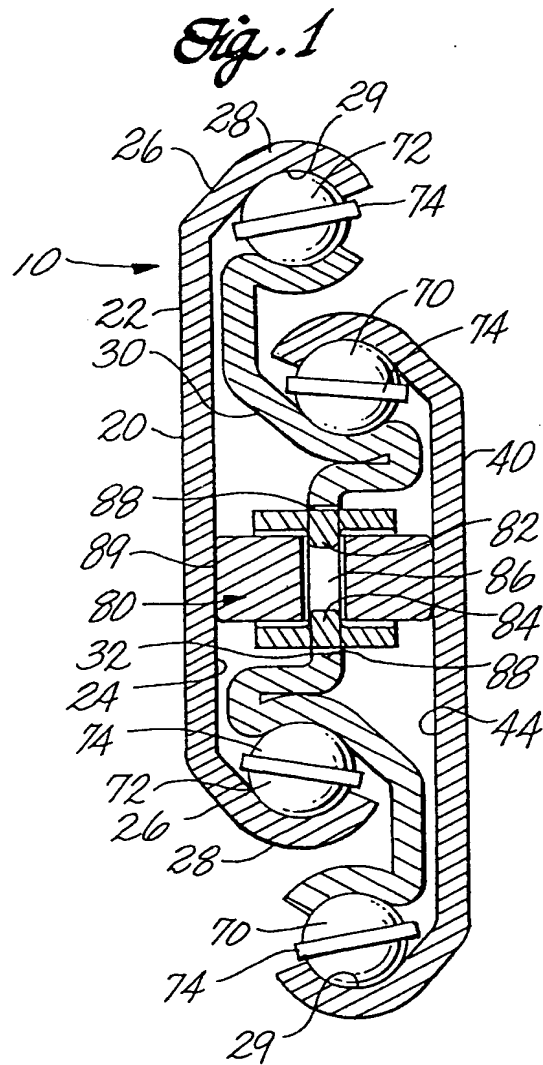

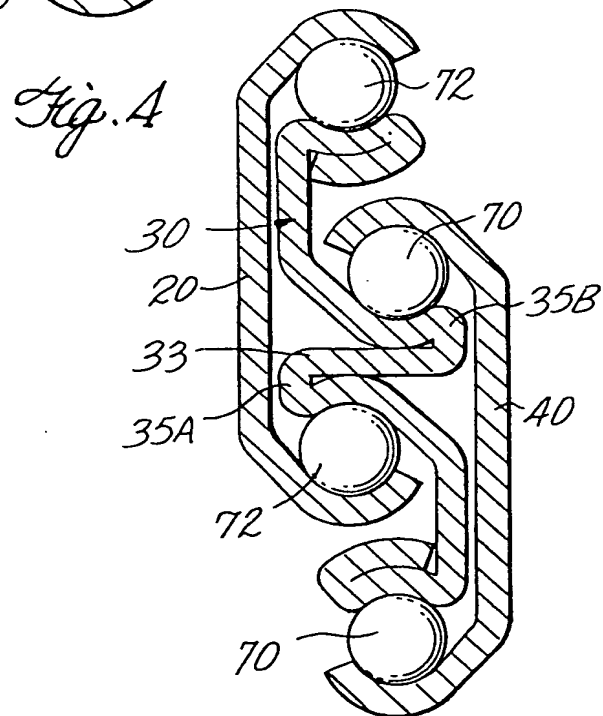
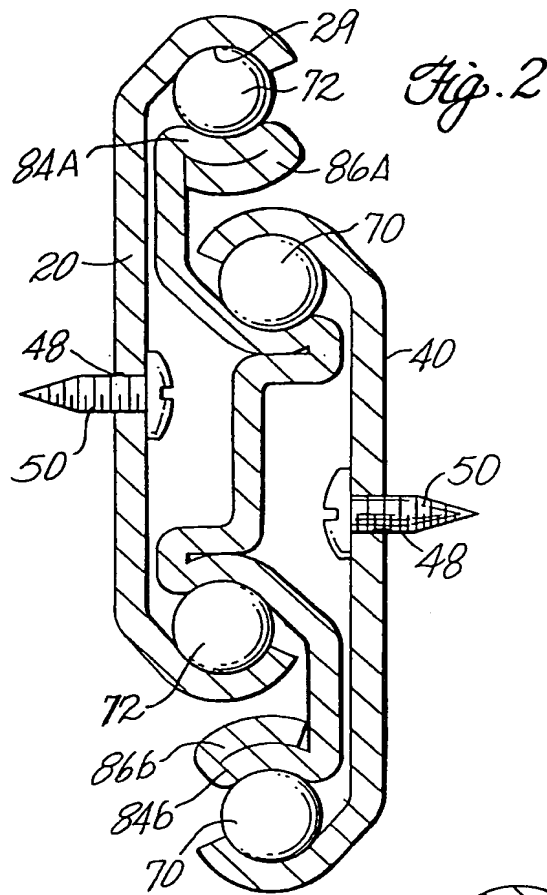
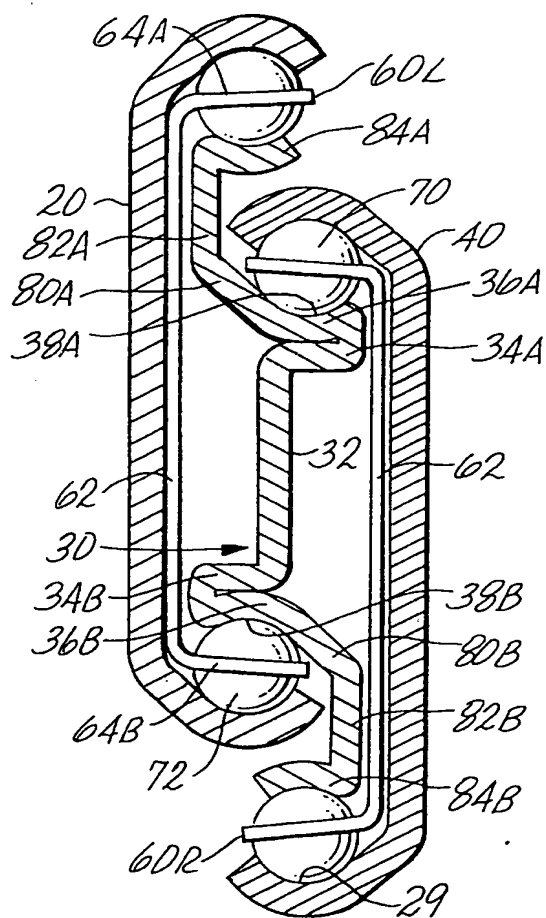


Fig. 3



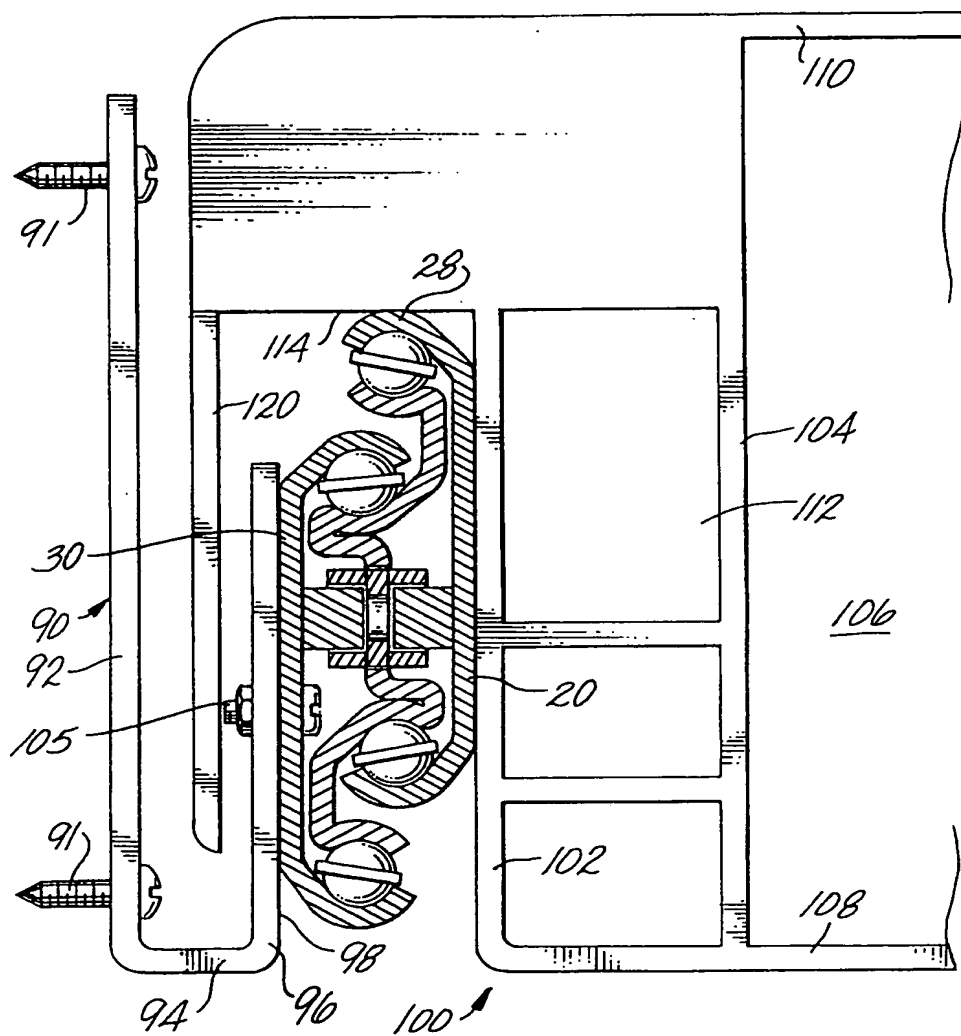


Fig. 5

Fig. 6

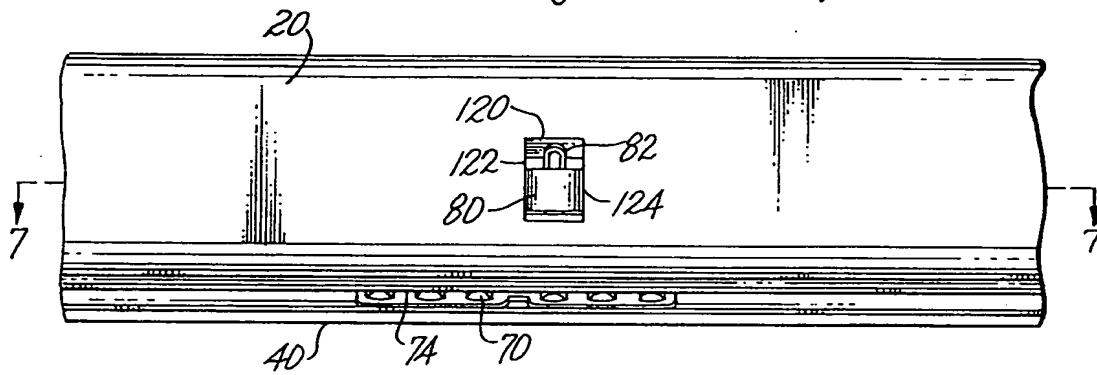


Fig. 7

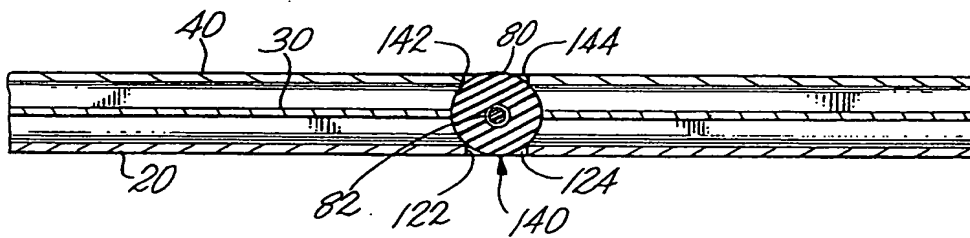


Fig. 8

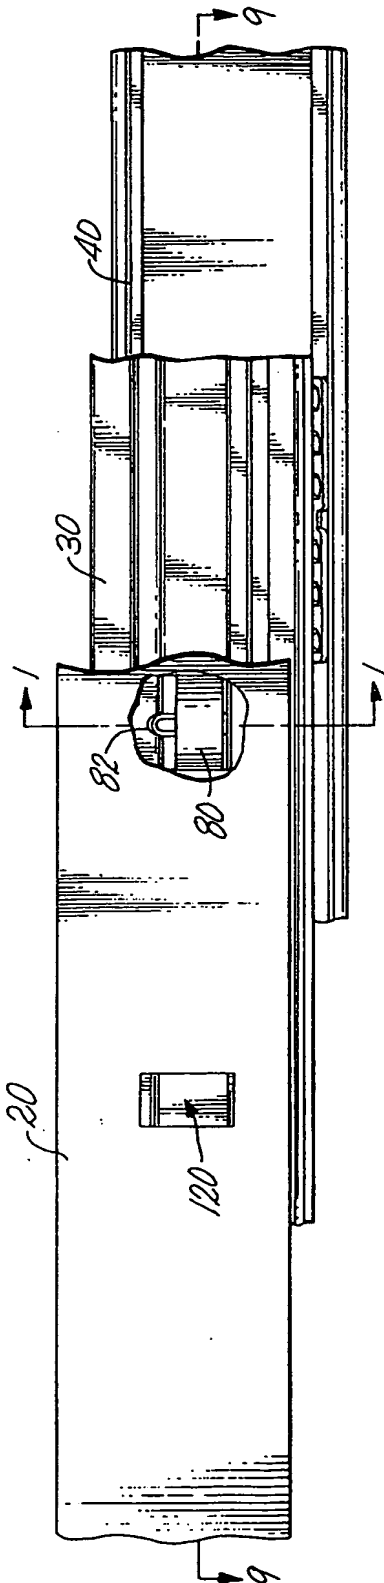


Fig. 9

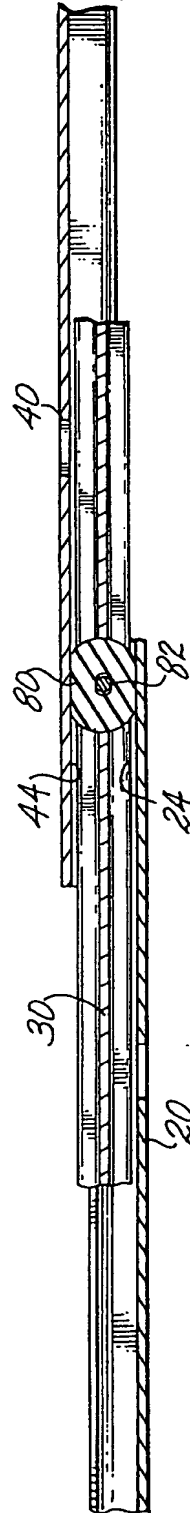


Fig. 10

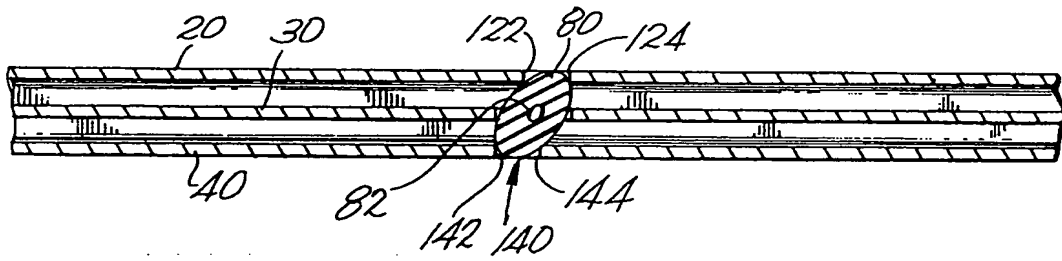


Fig. 11

